

# WHY CHOOSE TATTOO CONDENSATE PUMPS

Less Than  
19 dB  
Near Silent




## CONTENTS

1. TATTOO Pump Body
2. Plug & Play Detection Unit;  
5' Communication Wire Included
3. Connection Elbow
4. Ventilation Tube
5. Fixing Screws and Anchors
6. Double-sided Foam Adhesive



## FEATURES & BENEFITS

- **Near silent** - Less than 19 dB noise rating with built-in rubber absorbers
- **Can be installed up to 5'** from detection unit in any position
- Pre-wired alarm contact
- **Thermal security** of 230°F (110°C)
- Factory-installed check valve
- **Rigid Swiss quality standards** - Engineered, manufactured and tested
- Normally open/normally closed alarm 100V to 240V/8A
- **For systems up to 54,000 BTU**
- **Up to 25' vertical lift**

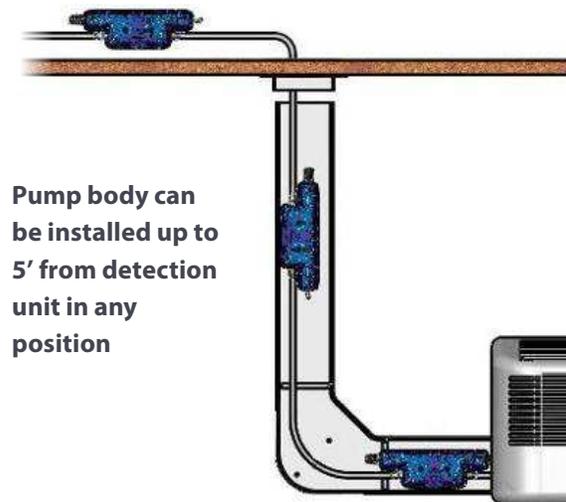

## QUICK REFERENCE GUIDE

Part Number	TATTOO16-120V	TATTOO16-230V
Max Flow Rate	4.3 GAL/HR	4.3 GAL/HR
Flow Rate at 3'	3.8 GAL/HR	3.8 GAL/HR
Flow Rate at 10'	2.8 GAL/HR	2.8 GAL/HR
Max Dry Suction Height	3.3'	3.3'
Max Wet Suction Height	6.6'	6.6'
Max Delivery Height	29.5'	29.5'
Alarm Contact	NO/NC-120V / 8A	NO/NC-120V / 8A
Pump Dimensions (L/W/H)	5.9" x 2.2" x 1.1"	5.9" x 2.2" x 1.1"
Sensor Dimensions (L/W/H)	3.2" x 1.6" x 1.6"	3.2" x 1.6" x 1.6"
Weight	15.5 oz	15.5 oz
Power Supply	120V	230V
Noise Level	<19 dBA	<19 dBA




## SUBMITTAL DATA SHEET | CONDENSATE PUMPS


<b>Job Name</b>	<b>Location</b>		
<b>Purchaser</b>	<b>Engineer</b>		
<b>Submitted To</b>	<b>Reference</b>	<b>Approval</b>	<b>Construction</b>
<b>Submitted By</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Unit Designation</b>	<b>Schedule</b>		
<b>Construction</b>	<b>Date</b>		

### COMPONENTS


- |                     |                            |
|---------------------|----------------------------|
| 1. Electronic Board | 3. Discharge & Check-Valve |
| 2. Solenoid Pump    | 4. Suction                 |

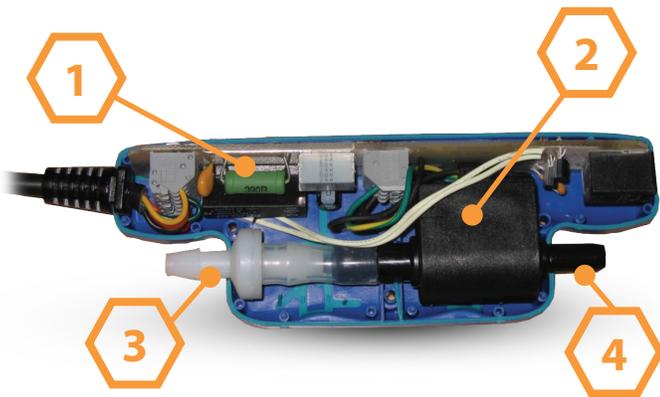

### INSTALLATION OPTIONS

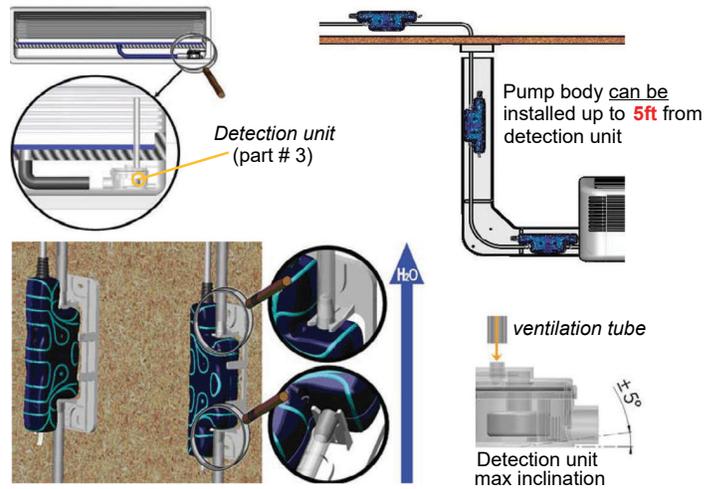

### WIRING - RESIDENTIAL

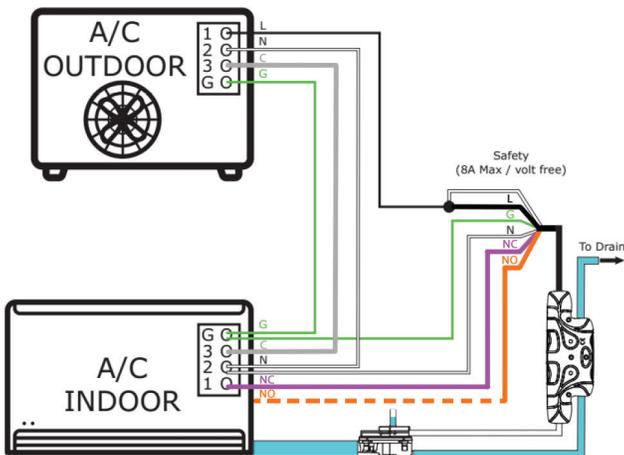

### WIRING - COMMERCIAL

